

NEW



DeskMini 310 SERIES

Dimension : 1.92L (155 x 155 x 80mm)



Supports Intel®
8th Gen Processors

Supports Dual
DDR4-2666 MHz



M.2 for PCIe &
CNVi Wi-Fi module

Supports Micro
SDXC Card Reader



CUSTOMIZE OPTIONS



COM Port




Wi-Fi Kit



VESA Mount Kit

H310M-STX OVERVIEW

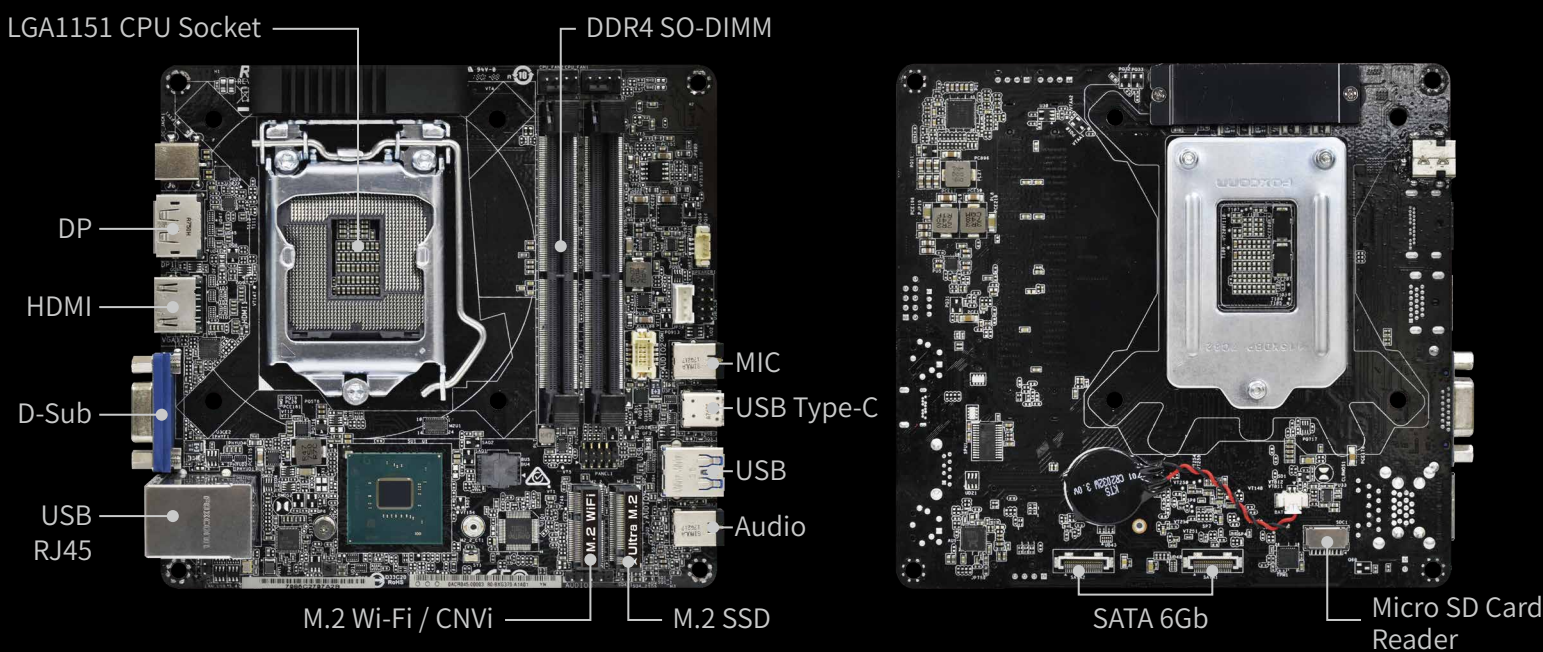

	DeskMini 310	DeskMini 310/COM	DeskMini 310W
CPU	Supports Intel 8 th Processors (Socket 1151) (Max. TDP 65W)	Supports Intel 8 th Processors (Socket 1151) (Max. TDP 65W)	Supports Intel 8 th Processors (Socket 1151) (Max. TDP 65W)
MB	H310M-STX	H310M-STX/COM	H310M-STX
Memory	Supports DDR4 2666MHz 2 x SO-DIMM Slots, Max. 32GB	Supports DDR4 2666MHz 2 x SO-DIMM Slots, Max. 32GB	Supports DDR4 2666MHz 2 x SO-DIMM Slots, Max. 32GB
Graphics	1 x HDMI, 1 x DP, 1 x VGA	1 x HDMI, 1 x DP, 1 x VGA	1 x HDMI, 1 x DP, 1 x VGA
Wi-Fi Slot	1 x M.2 (key E 2230) Slot for Wi-Fi + BT Module Support Intel CNVi module, PCIe	1 x M.2 (key E 2230) Slot for Wi-Fi + BT Module Support Intel CNVi module, PCIe	1 x M.2 (key E 2230) Slot for Wi-Fi + BT Module Support Intel CNVi module, PCIe
Storage	2 x SATA3 with Power connectors 1 x Ultra M.2 (2280) SSD Slot (PCIe Gen3 x4 / SATA6Gb) 1 x Micro SD Card Reader (bottom side)	2 x SATA3 with Power connectors 1 x Ultra M.2 (2280) SSD Slot (PCIe Gen3 x4 / SATA6Gb) 1 x Micro SD Card Reader (bottom side)	2 x SATA3 with Power connectors 1 x Ultra M.2 (2280) SSD Slot (PCIe Gen3 x4 / SATA6Gb) 1 x Micro SD Card Reader (bottom side)
Audio	1 x Head Phone with MIC Jack, 1 x MIC-In	1 x Head Phone with MIC Jack, 1 x MIC-In	1 x Head Phone with MIC Jack, 1 x MIC-In
USB	Rear: 1 x USB 2.0 Type-A 1 x USB 3.1 Gen1 Type-A Front: 1 x USB 3.1 Gen1 Type-C 1 x USB 3.1 Gen1 Type-A	Rear: 1 x USB 2.0 Type-A 1 x USB 3.1 Gen1 Type-A Front: 1 x USB 3.1 Gen1 Type-C 1 x USB 3.1 Gen1 Type-A	Rear: 1 x USB 2.0 Type-A 1 x USB 3.1 Gen1 Type-A Front: 1 x USB 3.1 Gen1 Type-C 1 x USB 3.1 Gen1 Type-A
LAN	Intel Gigabit I219V LAN	Intel Gigabit I219V LAN	Intel Gigabit I219V LAN
Onboard Header	2 x USB 2.0 Headers, 1 x Front Panel Header 2 x 4-Pin fan connectors (CPU, SYS) 1 x DC-In Jack (Supports 19V Power Adapters) 1 x Internal Speaker Header (4-Pin) 1 x Chassis Intrusion Header (2-Pin)	2 x USB 2.0 Headers, 1 x Front Panel Header 2 x 4-Pin fan connectors (CPU, SYS) 1 x COM Port Header 1 x DC-In Jack (Supports 19V Power Adapters) 1 x Internal Speaker Header (4-Pin) 1 x Chassis Intrusion Header (2-Pin)	2 x USB 2.0 Headers, 1 x Front Panel Header 2 x 4-Pin fan connectors (CPU, SYS) 1 x DC-In Jack (Supports 19V Power Adapters) 1 x Internal Speaker Header (4-Pin) 1 x Chassis Intrusion Header (2-Pin)
Accessory		COM Port Cable	Intel AC-3168 Wi-Fi Kit
Safety	CE, FCC	CE, FCC	CE, FCC
Dimension	1.92L (155 x 155 x 80mm)	1.92L (155 x 155 x 80mm)	1.92L (155 x 155 x 80mm)
Remark	Supports TPM 2.0 (Optional)	Supports TPM 2.0 (Optional)	Supports TPM 2.0 (Optional)